


X-AEW

彩虹立銑刀頭
End Mills / 3 Flute



| | |
|-----|----------------------|
| --- | 精銑 Finishing |
| ◎ | 中銑 Semi-finishing |
| ◎ | 粗銑 Roughing |

| | |
|-----|-----------------------------|
| ◎ | 乾式切削 Dry Machining |
| ◎ | 油霧切削 MQL (Mist) |
| ◎ | 水溶性切削 Emulsion Machining |
| --- | 油性切削 Oil Machining |

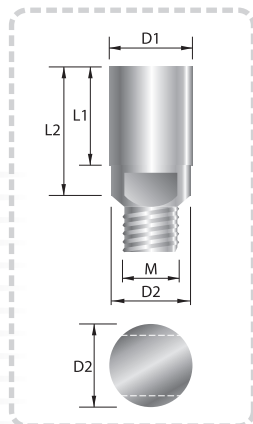

| 直徑 D1 | 直徑公差值 D1 Tolerance |
|----------|------------------------------------------|
| 8.0 | $\begin{matrix} 0 \\ -0.02 \end{matrix}$ |
| 10.0 | $\begin{matrix} 0 \\ -0.02 \end{matrix}$ |
| 12.0 | $\begin{matrix} 0 \\ -0.02 \end{matrix}$ |
| 16.0 | $\begin{matrix} 0 \\ -0.02 \end{matrix}$ |
| 20.0 | $\begin{matrix} 0 \\ -0.03 \end{matrix}$ |
| 25.0 | $\begin{matrix} 0 \\ -0.04 \end{matrix}$ |
| 32.0 | $\begin{matrix} 0 \\ -0.04 \end{matrix}$ |

unit : mm

| 型號 Type No. | D1 直徑 Diameter | L1 刃長 Flute Length | D2 頸徑 Neck Dia. | L2 全長 O.A.L. | M 螺牙 Thread Size | 鎖固扳手型號 Screw Driver Type No. |
|----------------|----------------------|--------------------------|-----------------------|--------------------|------------------------|------------------------------------|
| X-AEW0803 | 8.0 | 8.0 | 7.8 | 12.1 | M 5 -3P | K08 |
| X-AEW1003 | 10.0 | 10.0 | 9.8 | 16.1 | M 7 -3P | K10 |
| X-AEW1203 | 12.0 | 12.0 | 11.7 | 20.3 | M 8 -3P | K12 |
| X-AEW1603 | 16.0 | 16.0 | 15.6 | 25.7 | M10-3P | K16 |
| X-AEW2003 | 20.0 | 20.0 | 19.5 | 31.1 | M12-3P | K20 |
| X-AEW2503 | 25.0 | 25.0 | 24.4 | 39.3 | M16-3P | K25 |
| X-AEW3203 | 32.0 | 32.0 | 31.2 | 48.0 | M20-3P | K32 |

unit : mm