


X-UEYR

直刃圓鼻角立銑刀頭
End Mills



| | |
|--|----------------------|
| | 精銑 Finishing |
| | 中銑 Semi-finishing |
| | 粗銑 Roughing |

| | |
|--|-----------------------------|
| | 乾式切削 Dry Machining |
| | 油霧切削 MQL (Mist) |
| | 水溶性切削 Emulsion Machining |
| | 油性切削 Oil Machining |

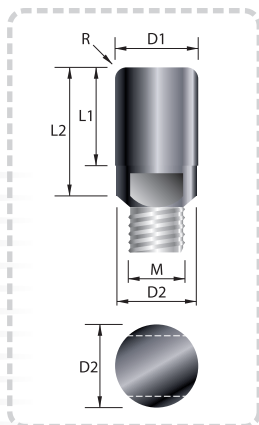

| 直徑 D1 | R 徑公差值 R Tolerance | 直徑公差值 D1 Tolerance |
|----------|-----------------------|-----------------------|
| 8.0 | +0.02 0 | 0 -0.02 |
| 10.0 | +0.02 0 | 0 -0.02 |
| 12.0 | +0.02 0 | 0 -0.02 |
| 16.0 | +0.02 0 | 0 -0.02 |
| 20.0 | +0.02 0 | 0 -0.03 |

unit : mm

| 型號 Type No. | D1 直徑 Diameter | L1 刃長 Flute Length | R 圓鼻角 Corner R | D2 頸徑 Neck Dia. | L2 全長 O.A.L. | M 螺牙 Thread Size | 鎖固扳手型號 Screw Driver Type No. |
|----------------|----------------------|--------------------------|----------------------|-----------------------|--------------------|------------------------|------------------------------------|
| X-UEYR0810 | 8.0 | 3.5 | 1.0 | 7.8 | 10.1 | M 5 -3P | K08 |
| X-UEYR0820 | 8.0 | 3.5 | 2.0 | 7.8 | 10.1 | M 5 -3P | K08 |
| X-UEYR1010 | 10.0 | 4.0 | 1.0 | 9.8 | 11.1 | M 7 -3P | K10 |
| X-UEYR1020 | 10.0 | 4.0 | 2.0 | 9.8 | 11.1 | M 7 -3P | K10 |
| X-UEYR1220 | 12.0 | 5.0 | 2.0 | 11.7 | 13.8 | M 8 -3P | K12 |
| X-UEYR1230 | 12.0 | 5.0 | 3.0 | 11.7 | 13.8 | M 8 -3P | K12 |
| X-UEYR1620 | 16.0 | 6.5 | 2.0 | 15.6 | 14.7 | M10-3P | K16 |
| X-UEYR1630 | 16.0 | 6.5 | 3.0 | 15.6 | 14.7 | M10-3P | K16 |
| X-UEYR1640 | 16.0 | 6.5 | 4.0 | 15.6 | 14.7 | M10-3P | K16 |
| X-UEYR2030 | 20.0 | 8.0 | 3.0 | 19.5 | 18.1 | M12-3P | K20 |
| X-UEYR2050 | 20.0 | 8.0 | 5.0 | 19.5 | 18.1 | M12-3P | K20 |

unit : mm