

## X-UOR

直刃圓鼻角立銑刀頭  
End Mills




0.2  
μm



	精銑 Finishing
	中銑 Semi-finishing
	粗銑 Roughing

	乾式切削 Dry Machining
	油霧切削 MQL ( Mist )
	水溶性切削 Emulsion Machining
	油性切削 Oil Machining

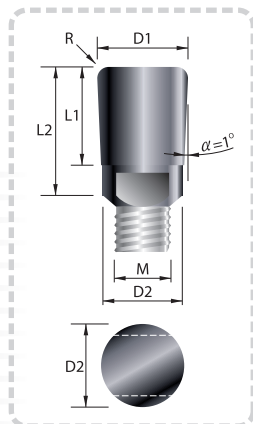

直徑 D1	R 徑公差值 R Tolerance
8.0	+0.02 0
10.0	+0.02 0
12.0	+0.02 0
16.0	+0.02 0
20.0	+0.02 0

unit : mm

型號 Type No.	D1 直徑 Diameter	L1 刃長 Flute Length	R 圓鼻角 Corner R	D2 頸徑 Neck Dia.	L2 全長 O.A.L.	M 螺牙 Thread Size	鎖固扳手型號 Screw Driver Type No.
X-UOR0810	8.0	3.5	1.0	7.8	10.1	M 5 -3P	K08
X-UOR0820	8.0	3.5	2.0	7.8	10.1	M 5 -3P	K08
X-UOR1010	10.0	4.0	1.0	9.8	11.1	M 7 -3P	K10
X-UOR1020	10.0	4.0	2.0	9.8	11.1	M 7 -3P	K10
X-UOR1220	12.0	5.0	2.0	11.7	13.8	M 8 -3P	K12
X-UOR1230	12.0	5.0	3.0	11.7	13.8	M 8 -3P	K12
X-UOR1620	16.0	6.5	2.0	15.6	14.7	M10-3P	K16
X-UOR1630	16.0	6.5	3.0	15.6	14.7	M10-3P	K16
X-UOR1640	16.0	6.5	4.0	15.6	14.7	M10-3P	K16
X-UOR2030	20.0	8.0	3.0	19.5	18.1	M12-3P	K20
X-UOR2050	20.0	8.0	5.0	19.5	18.1	M12-3P	K20

unit : mm