

X-UXR


圓鼻角立銼刀頭
End Mills



G12

| | |
|--|----------------------|
| | 精銑 Finishing |
| | 中銑 Semi-finishing |
| | 粗銑 Roughing |

| | | |
|--|--|-----------------------------|
| | | 乾式切削 Dry Machining |
| | | 油霧切削 MQL (Mist) |
| | | 水溶性切削 Emulsion Machining |
| | | 油性切削 Oil Machining |

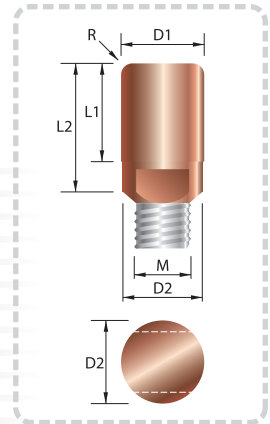

| 直徑 D1 | R 徑公差值 R Tolerance | 直徑公差值 D1 Tolerance |
|----------|-----------------------|-----------------------|
| 8.0 | +0.02 0 | 0 -0.02 |
| 10.0 | +0.02 0 | 0 -0.02 |
| 12.0 | +0.02 0 | 0 -0.02 |
| 16.0 | +0.02 0 | 0 -0.02 |
| 20.0 | +0.02 0 | 0 -0.03 |
| 25.0 | +0.02 0 | 0 -0.04 |

unit : mm

| 型號 Type No. | D1 直徑 Diameter | L1 刃長 Flute Length | R 圓鼻角 Corner R | D2 頸徑 Neck Dia. | L2 全長 O.A.L. | M 螺牙 Thread Size | 鎖固扳手型號 Screw Driver Type No. |
|----------------|-------------------|-----------------------|-------------------|--------------------|-----------------|---------------------|------------------------------------|
| X-UXR0803 | 8.0 | 8.5 | 0.3 | 7.8 | 12.1 | M 5 -3P | K08 |
| X-UXR0805 | 8.0 | 8.5 | 0.5 | 7.8 | 12.1 | M 5 -3P | K08 |
| X-UXR0810 | 8.0 | 8.5 | 1.0 | 7.8 | 12.1 | M 5 -3P | K08 |
| X-UXR1005 | 10.0 | 10.0 | 0.5 | 9.8 | 16.1 | M 7 -3P | K10 |
| X-UXR1010 | 10.0 | 10.0 | 1.0 | 9.8 | 16.1 | M 7 -3P | K10 |
| X-UXR1205 | 12.0 | 12.0 | 0.5 | 11.7 | 20.3 | M 8 -3P | K12 |
| X-UXR1210 | 12.0 | 12.0 | 1.0 | 11.7 | 20.3 | M 8 -3P | K12 |
| X-UXR1605 | 16.0 | 16.0 | 0.5 | 15.6 | 25.7 | M10-3P | K16 |
| X-UXR1610 | 16.0 | 16.0 | 1.0 | 15.6 | 25.7 | M10-3P | K16 |
| X-UXR1620 | 16.0 | 16.0 | 2.0 | 15.6 | 25.7 | M10-3P | K16 |
| X-UXR2010 | 20.0 | 20.0 | 1.0 | 19.5 | 31.1 | M12-3P | K20 |
| X-UXR2020 | 20.0 | 20.0 | 2.0 | 19.5 | 31.1 | M12-3P | K20 |
| X-UXR2030 | 20.0 | 20.0 | 3.0 | 19.5 | 31.1 | M12-3P | K20 |
| X-UXR2530 | 25.0 | 25.0 | 3.0 | 24.4 | 39.3 | M16-3P | K25 |
| X-UXR2550 | 25.0 | 25.0 | 5.0 | 24.4 | 39.3 | M16-3P | K25 |

unit : mm