


Xs-UBT

爆丸球刀頭
Ball Nose End Mills



	精銑 Finishing
	中銑 Semi-finishing
	粗銑 Roughing

		乾式切削 Dry Machining
		油霧切削 MQL (Mist)
		水溶性切削 Emulsion Machining
		油性切削 Oil Machining

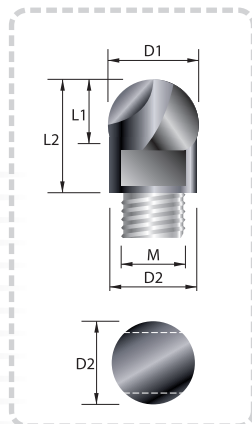

直徑 D1	球頭公差值 R Tolerance
R4.0	±0.02
R5.0	±0.02
R6.0	±0.02
R8.0	±0.02
R10.0	±0.02
R12.5	±0.02

unit : mm

型號 Type No.	D1 直徑 Diameter	L1 刃長 Flute Length	D2 頸徑 Neck Dia.	L2 全長 O.A.L.	M 螺牙 Thread Size	鎖固扳手型號 Screw Driver Type No.
Xs-UBT0802	R 4.0	6.0	7.8	10.1	M 5 -3P	K08
Xs-UBT1002	R 5.0	7.0	9.8	11.1	M 7 -3P	K10
Xs-UBT1202	R 6.0	9.0	11.7	13.8	M 8 -3P	K12
Xs-UBT1602	R 8.0	10.0	15.6	14.7	M10-3P	K16
Xs-UBT2002	R10.0	12.0	19.5	18.1	M12-3P	K20
Xs-UBT2502	R12.5	16.0	24.4	22.3	M16-3P	K25

unit : mm