


UVT

END MILLS

高硬度立銑刀

| 直徑 D1 | 直徑公差 D1 Tolerance | 柄徑 D2(h6) | 柄徑公差 D2 Tolerance |
|----------|-------------------------|--------------|-------------------------|
| 6.0 | 0 -0.02 | Ø6 | 0 -0.008 |
| 8.0 | 0 -0.025 | Ø8 | 0 -0.009 |
| 10.0 | 0 -0.03 | Ø10 | 0 -0.009 |
| 12.0 | 0 -0.035 | Ø12 | 0 -0.011 |
| 16.0 | 0 -0.04 | Ø16 | 0 -0.011 |
| 20.0 | 0 -0.04 | Ø20 | 0 -0.013 |

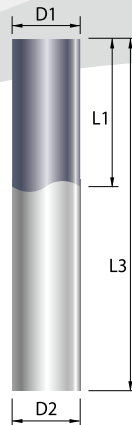

| 型號 Type No. | D1 直徑 Diameter | L1 刃長 Flute Length | L3 全長 O.A.L. | D2 柄徑 Shank Dia. |
|----------------|----------------------|--------------------------|--------------------|------------------------|
| UVT0606 | 6.0 | 16 | 50 | 6 |
| UVT0606L | 6.0 | 16 | 75 | 6 |
| UVT0806 | 8.0 | 20 | 60 | 8 |
| UVT0806L | 8.0 | 20 | 100 | 8 |
| UVT1006 | 10.0 | 25 | 75 | 10 |
| UVT1006L | 10.0 | 25 | 100 | 10 |
| UVT1206 | 12.0 | 30 | 75 | 12 |
| UVT1206L | 12.0 | 30 | 100 | 12 |
| UVT1606 | 16.0 | 40 | 100 | 16 |
| UVT2006 | 20.0 | 45 | 100 | 20 |

unit : mm



| | |
|--|----------------------|
| | 精銑 Finishing |
| | 中銑 Semi-finishing |
| | 粗銑 Roughing |

| | | |
|--|--|-----------------------------|
| | | 乾式切削 Dry Machining |
| | | 油霧切削 MQL (Mist) |
| | | 水溶性切削 Emulsion Machining |
| | | 油性切削 Oil Machining |