




UXR

END MILLS

極超微粒圓鼻角立銑刀

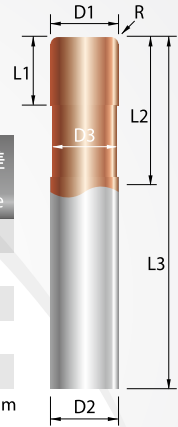

直徑 D1	R徑公差 R Tolerance	直徑公差 D1 Tolerance
4.0	+0.02 0	0 -0.02
6.0	+0.02 0	0 -0.02
8.0	+0.02 0	0 -0.025
10.0	+0.02 0	0 -0.03
12.0	+0.02 0	0 -0.035
16.0	+0.02 0	0 -0.04

柄徑 D2(h6)	柄徑公差 D2 Tolerance
Ø6	0 -0.008
Ø8	0 -0.009
Ø10	0 -0.009
Ø12	0 -0.011
Ø16	0 -0.011

unit : mm

Super MG

0.4 μm

55°

R

4 Flutes

HRC >60

G12

型號 Type No.	D1 直徑 Diameter	D3 頸徑 Neck Dia.	R 角 Corner R	L1 刃長 Flute Length	L2 有效長 Effective Length	L3 全長 O.A.L.	D2 柄徑 Shank Dia.
UXR0403	4.0	3.90	0.3	6	12	50	6
UXR0405	4.0	3.90	0.5	6	12	50	6
UXR0603	6.0	5.80	0.3	8	18	50	6
UXR0605	6.0	5.80	0.5	8	18	50	6
UXR0610	6.0	5.80	1.0	8	18	50	6
UXR0803	8.0	7.70	0.3	10	24	60	8
UXR0805	8.0	7.70	0.5	10	24	60	8
UXR0810	8.0	7.70	1.0	10	24	60	8
UXR1005	10.0	9.60	0.5	12	30	75	10
UXR1010	10.0	9.60	1.0	12	30	75	10
UXR1020	10.0	9.60	2.0	12	30	75	10
UXR1030	10.0	9.60	3.0	12	30	75	10
UXR1205	12.0	11.5	0.5	15	36	75	12
UXR1210	12.0	11.5	1.0	15	36	75	12
UXR1605	16.0	15.5	0.5	24	40	100	16
UXR1610	16.0	15.5	1.0	24	40	100	16

unit : mm

精銑
Finishing

中銑
Semi-finishing

粗銑
Roughing

乾式切削
Dry Machining

油霧切削
MQL (Mist)

水性切削劑
Emulsion Machining

油性切削
Oil Machining