


X-WDEX

抗震鎢鋼刀桿 (內冷孔)

Solid Carbide Shank (Internal Coolant Hole)

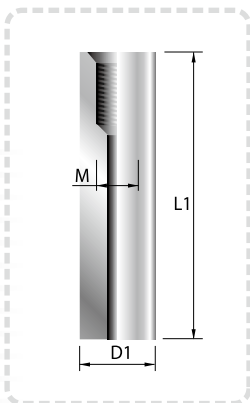

柄徑 D1	柄徑公差值 D1 Tolerance
8.0	0 -0.009
10.0	0 -0.009
12.0	0 -0.011
16.0	0 -0.011
20.0	0 -0.013
25.0	0 -0.013
32.0	0 -0.016

unit : mm

型號 Type No.	D1 柄徑 Shank Dia.	L1 全長 O.A.L.	M 螺牙 Thread Size
X-WDEX-080060	8.0	60	M 5 -3P
X-WDEX-080075	8.0	75	M 5 -3P
X-WDEX-080100	8.0	100	M 5 -3P
X-WDEX-100060	10.0	60	M 7 -3P
X-WDEX-100075	10.0	75	M 7 -3P
X-WDEX-100100	10.0	100	M 7 -3P
X-WDEX-100150	10.0	150	M 7 -3P
X-WDEX-120060	12.0	60	M 8 -3P
X-WDEX-120080	12.0	80	M 8 -3P
X-WDEX-120100	12.0	100	M 8 -3P
X-WDEX-120150	12.0	150	M 8 -3P
X-WDEX-160060	16.0	60	M10 -3P
X-WDEX-160080	16.0	80	M10 -3P
X-WDEX-160100	16.0	100	M10 -3P
X-WDEX-160150	16.0	150	M10 -3P
X-WDEX-160200	16.0	200	M10 -3P
X-WDEX-200060	20.0	60	M12 -3P

型號 Type No.	D1 柄徑 Shank Dia.	L1 全長 O.A.L.	M 螺牙 Thread Size
X-WDEX-200080	20.0	80	M12 -3P
X-WDEX-200100	20.0	100	M12 -3P
X-WDEX-200150	20.0	150	M12 -3P
X-WDEX-200200	20.0	200	M12 -3P
X-WDEX-200250	20.0	250	M12 -3P
X-WDEX-200300	20.0	300	M12 -3P
X-WDEX-250100	25.0	100	M16 -3P
X-WDEX-250150	25.0	150	M16 -3P
X-WDEX-250200	25.0	200	M16 -3P
X-WDEX-250250	25.0	250	M16 -3P
X-WDEX-250300	25.0	300	M16 -3P
X-WDEX-320100	32.0	100	M20 -3P
X-WDEX-320150	32.0	150	M20 -3P
X-WDEX-320200	32.0	200	M20 -3P
X-WDEX-320250	32.0	250	M20 -3P
X-WDEX-320300	32.0	300	M20 -3P

unit : mm