


## X-WFEX

抗震鎢鋼刀桿（內冷孔）

Solid Carbide Shank (Internal Coolant Hole)

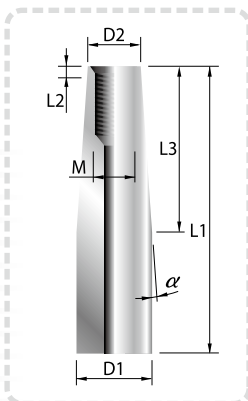

柄徑 D1	柄徑公差值 D1 Tolerance
12.0	$0_{-0.011}$
16.0	$0_{-0.011}$
20.0	$0_{-0.013}$
25.0	$0_{-0.013}$
32.0	$0_{-0.016}$

unit : mm

型號 Type No.	D2 頸徑 Neck Dia.	L1 全長 O.A.L.	L2 有效長 Effective Length	L3 斜頸長 T.A.L.	D1 柄徑 Shank Dia. (h6)	M 螺牙 Thread Size	α' 斜角 Taper Angle
X-WFEX-120100	9.8	100	2	44	12.0	M 7 -3P	1.5
X-WFEX-120150	9.8	150	2	65	12.0	M 7 -3P	1.0
X-WFEX-160100	11.7	100	3	50	16.0	M 8 -3P	2.0
X-WFEX-160150	11.7	150	3	85	16.0	M 8 -3P	1.5
X-WFEX-160200	11.7	200	3	126	16.0	M 8 -3P	1.0
X-WFEX-200100	15.6	100	4	50	20.0	M10-3P	2.0
X-WFEX-200150	15.6	150	4	88	20.0	M10-3P	1.5
X-WFEX-200200	15.6	200	4	130	20.0	M10-3P	1.0
X-WFEX-250200	19.5	200	6	111	25.0	M12-3P	1.5
X-WFEX-250300	19.5	300	6	164	25.0	M12-3P	1.0
X-WFEX-320300	24.4	300	8	153	32.0	M16-3P	1.5

unit : mm