


X-WHEX

抗震鎢鋼刀桿 (內冷孔)

Solid Carbide Shank (Internal Coolant Hole)

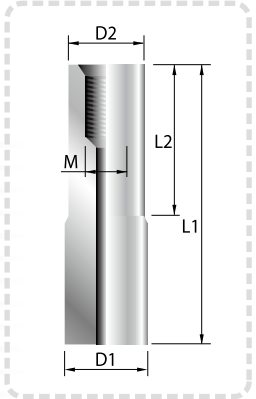

柄徑 D1	柄徑公差值 D1 Tolerance
8.0	0 -0.009
10.0	0 -0.009
12.0	0 -0.011
16.0	0 -0.011
20.0	0 -0.013
25.0	0 -0.013
32.0	0 -0.016

unit : mm

型號 Type No.	D2 頸徑 Neck Dia.	L1 全長 O.A.L.	L2 有效長 Effective Length	D1 柄徑 Shank Dia. (h6)	M 螺牙 Thread Size	型號 Type No.	D2 頸徑 Neck Dia.	L1 全長 O.A.L.	L2 有效長 Effective Length	D1 柄徑 Shank Dia. (h6)	M 螺牙 Thread Size
X-WHEX-080060	7.8	60	15	8.0	M 5 -3P	X-WHEX-200080	19.5	80	40	20.0	M12 -3P
X-WHEX-080075	7.8	75	20	8.0	M 5 -3P	X-WHEX-200100	19.5	100	60	20.0	M12 -3P
X-WHEX-080100	7.8	100	20	8.0	M 5 -3P	X-WHEX-200150	19.5	150	90	20.0	M12 -3P
X-WHEX-100060	9.8	60	15	10.0	M 7 -3P	X-WHEX-200200	19.5	200	120	20.0	M12 -3P
X-WHEX-100075	9.8	75	20	10.0	M 7 -3P	X-WHEX-200250	19.5	250	150	20.0	M12 -3P
X-WHEX-100100	9.8	100	20	10.0	M 7 -3P	X-WHEX-200300	19.5	300	180	20.0	M12 -3P
X-WHEX-100150	9.8	150	40	10.0	M 7 -3P	X-WHEX-250100	24.4	100	50	25.0	M16 -3P
X-WHEX-120060	11.7	60	15	12.0	M 8 -3P	X-WHEX-250150	24.4	150	90	25.0	M16 -3P
X-WHEX-120080	11.7	80	20	12.0	M 8 -3P	X-WHEX-250200	24.4	200	120	25.0	M16 -3P
X-WHEX-120100	11.7	100	60	12.0	M 8 -3P	X-WHEX-250250	24.4	250	150	25.0	M16 -3P
X-WHEX-120150	11.7	150	90	12.0	M 8 -3P	X-WHEX-250300	24.4	300	180	25.0	M16 -3P
X-WHEX-160060	15.6	60	15	16.0	M10 -3P	X-WHEX-320100	31.2	100	50	32.0	M20 -3P
X-WHEX-160080	15.6	80	30	16.0	M10 -3P	X-WHEX-320150	31.2	150	90	32.0	M20 -3P
X-WHEX-160100	15.6	100	60	16.0	M10 -3P	X-WHEX-320200	31.2	200	120	32.0	M20 -3P
X-WHEX-160150	15.6	150	90	16.0	M10 -3P	X-WHEX-320250	31.2	250	150	32.0	M20 -3P
X-WHEX-160200	15.6	200	120	16.0	M10 -3P	X-WHEX-320300	31.2	300	180	32.0	M20 -3P
X-WHEX-200060	19.5	60	20	20.0	M12 -3P						

unit : mm

★ X-WHEX系列之L2可依客戶需求特別訂做。